

# T3 TIMER INSTRUCTIONS

## 1. PLUG IN POWER CORD

## 2. SET DESIRED TIME

Remove cover to set the time. The time is adjustable between 1sec.to 99 hours. Adjustment is made to the hours, minutes and seconds in turn as follows:

### HOURS

Push the "MODE" button. Display will read "F1" which indicates the *hours* setting will be adjusted. After a second, the display will switch to show the number of hours programmed. At this point you may adjust the number of hours with the UP or DOWN button.


### MINUTES

By pressing MODE button again. 'F2 ' is displayed. Again, after a second it switches to show the number of minutes programmed.

### SECONDS

By pressing MODE button again 'F3 ' is displayed. Again, after a second it switches to show the number of minutes programmed. Adjust with the UP or DOWN buttons.

When time is set, replace the cover with screws. Settings are "remembered" if power is removed.

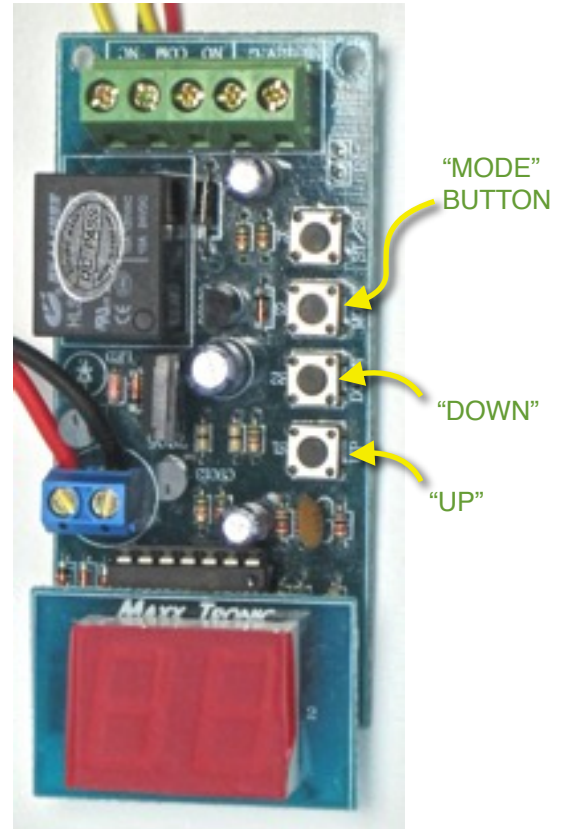


## 3. OPERATION

Push the green "START" button to start the timing cycle. Button illuminates during the countdown. Timer will beep five times when the timing cycle is done. Pushing the green button during the cycle will abort the countdown.

## 4. CHANGING RELAY STATE

The timer is shipped so the relay closes during the countdown period. If you prefer, the relay can work the opposite way so it is closed when *not* timing. To do this unplug the power cord and move the pink wire to the N.C. slot on the terminal block.

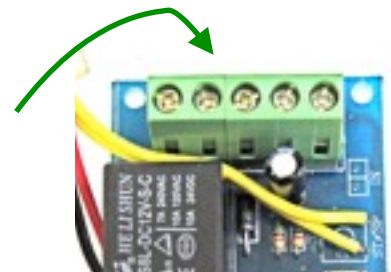

Sep 2, 2015