

W SERIES, THERMOWELLS					
OVER THE SIDE WELLS					
THERMOWELL MATERIAL	DIA.	MODEL NO. 12" LENGTH (305mm)	MODEL NO. 24" LENGTH (610mm)	MODEL NO. 36" LENGTH (915mm)	SHIP WGT. Lbs./kg
Quartz	1/2"	WQ12	WQ24	WQ36	2 (1)
304 SS	1/2"	WF12	WF24	WF36	2 (1)
316 SS	1/2"	WS12	WS24	WS36	2 (1)
Titanium	1/2"	WT12	WT24	WT36	2 (1)
Fluoropolymer (PFA)	1/2"	WX12	WX24	WX36	2 (1)
1/2" NPT THREADED WELLS					
304 SS	1/2"	WFT12	WFT24	WFT36	2 (1)
316 SS	1/2"	WST12	WST24	WST36	2 (1)
Titanium	1/2"	WTT12	WTT24	WTT36	2 (1)
Fluoropolymer (PFA)	1/2"	WXT12	WXT24	WXT36	2 (1)

Can be ordered as part of a combination temperature control assembly.

Product Features and Benefits


- ◆ **APPLICATIONS:** Secures and protects temperature control sensors in tanks.
- ◆ **MATERIALS OF CONSTRUCTION:**
 - Quartz.
 - 304 stainless steel.
 - 316 stainless steel.
 - Titanium.
 - Fluoropolymer (PFA) covered 316 stainless steel.
- ◆ **CAPACITIES:**
 - OVER THE SIDE MODELS: ½ inch diameter tubing with mounting flange standard.
 - THREADED MODELS: ½ inch MNPT standard.
- ◆ **OPTIONS AVAILABLE (consult factory):**
 - Special diameters.
 - Meter sizes.
 - Special lengths.

Your Distributor:

80 Metcalfe Street • Buffalo, NY 14206 U.S.A. • **US/CN: 800-777-2436** • 716-856-2300 • Fax: 716-856-7115

www.cdibuffalo.com • E-mail: sales@cdibuffalo.com

DIMENSIONS

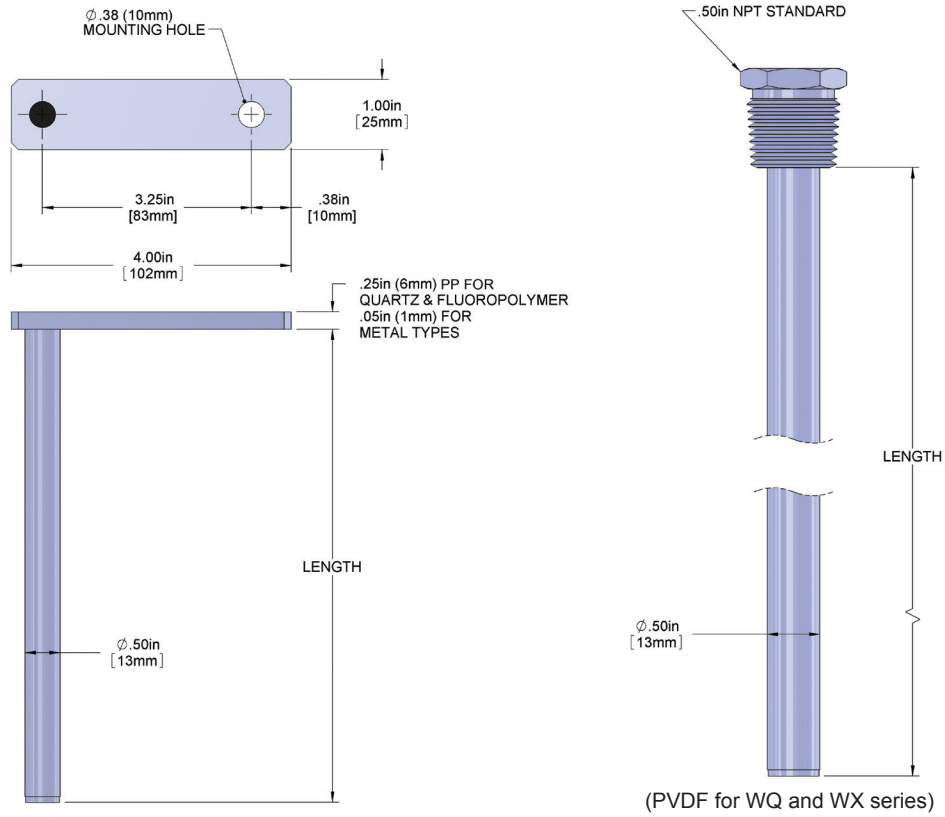

THERMOWELL ORDERING INFORMATION

Series	Mounting	Length	Options
no designator = flange mount T = 1/2" NPT connection WQ = Quartz WF = 304 Stainless Steel WS = 316 Stainless Steel WT = Titanium WX = Fluoropolymer (PFA)	12 = 12" 24 = 24" 36 = 36" specify custom lengths	X = any special configuration not called out in the part number (specify in clear text) 1 inch = 25.4mm	

ORDERING EXAMPLE:

WS36
 316 stainless steel thermowell, 36" long.

Your Distributor:

80 Metcalfe Street • Buffalo, NY 14206 U.S.A. • **US/CN: 800-777-2436** • 716-856-2300 • Fax: 716-856-7115
 www.cdibuffalo.com • E-mail: sales@cdibuffalo.com